



Blindnietmutter FO-A2




Materialausführungen

Blindnietmutter (FO-A2)

Flachkopf offen, Aluminium gerändelt unter Kopf

Aluminium blank

Sonderabmessungen auf Anfrage

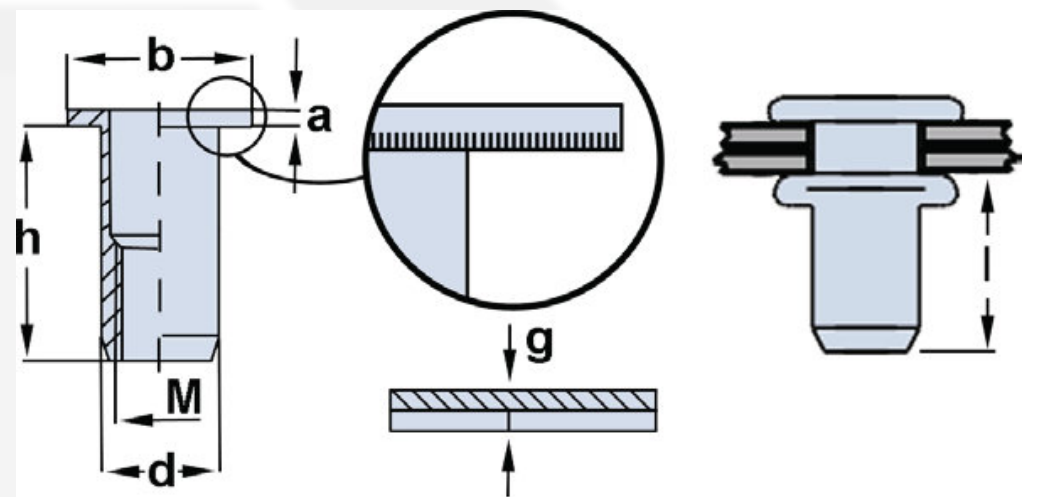

Bezeichnung	Gewinde M	d	Ø b	a	Bohrung	Blechdicke (g)	l	h
M3 TP-C M3 TP-L	M3	4,9	7,0	0,8	5	0,3 - 1,8 1,8 - 3,0	4,2 - 4,6	9,0 10,5
M4 TP-C M4 TP-L	M4	5,9	9,0	1,0	6	0,3 - 2,5 2,5 - 4,0	5,5 - 6,0	11,0 13,0
M5 TP-C M5 TP-L	M5	6,9	10,0	1,2	7	0,5 - 3,0 3,0 - 5,0	7,2 - 7,7	13,0 15,5
M6 TP-C M6 TP-M M6 TP-L	M6	8,9	12,0	1,5	9	0,5 - 2,0 2,3 - 4,0 4,0 - 6,0	7,6 - 8,2	14,5 16,0 17,5
M8 TP-C M8 TP-L	M8	10,9	15,0	1,5	11	0,8 - 3,5 3,5 - 6,0	9,5 - 10,1	17,5 20,0
M10 TP-C M10 TP-L	M10	11,9	16,0	1,7	12	1,0 - 3,5 3,5 - 6,0	10,7 - 11,5	19,0 22,0

Maße in mm

Bitte senden Sie
Ihre Anfrage an:

Email: vertrieb@auel-gmbh.de
 Telefon: +49 2354 9046 24
 Adresse: Auf dem Bamberg 4
 58540 Meinerzhagen



Management
System
ISO 9001:2015