



# Blindnietmutter FO-S6



## Materialausführungen


### Blindnietmutter (FO-S6)

#### Flachkopf offen, Stahl Teilsechskantschaft

Oberfläche: verzinkt

Die Oberfläche ist RoHS konform

Sonderabmessungen auf Anfrage

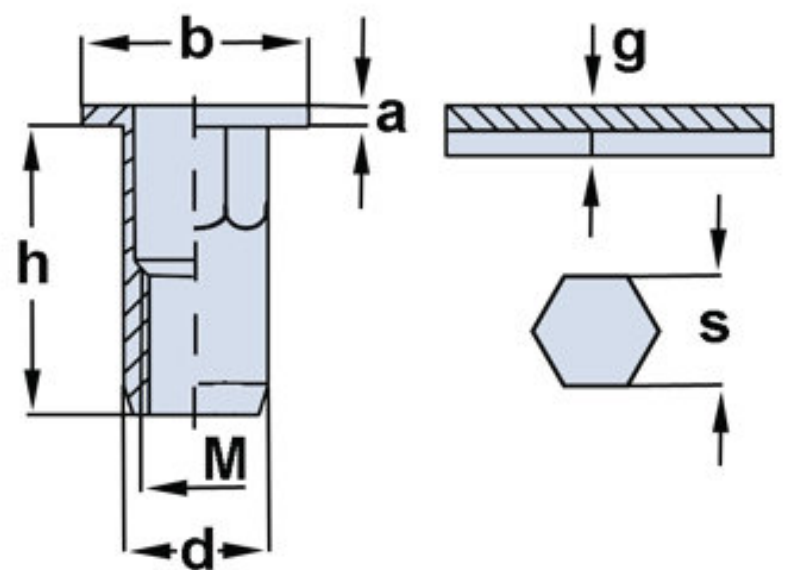

| Gewinde M | d    | h         | Blechdicke (g)      | s    | Ø b  | a    |
|-----------|------|-----------|---------------------|------|------|------|
| M3        | 4,9  | 8,5       | 0,3 - 1,8           | 5,0  | 8,0  | 0,75 |
| M4        | 5,9  | 10,5 12,5 | 0,3 - 2,0 2,0 - 4,0 | 6,0  | 9,0  | 0,8  |
| M5        | 6,9  | 14,0      | 0,5 - 3,0           | 7,0  | 10,0 | 1,0  |
| M6        | 8,9  | 16,0      | 0,5 - 3,0           | 9,0  | 13,0 | 1,5  |
| M8        | 10,9 | 17,0      | 0,5 - 3,5           | 11,0 | 16,0 | 1,5  |
| M10       | 12,9 | 21,0      | 1,0 - 3,5           | 13,0 | 17,0 | 1,7  |
| M12       | 15,9 | 25,0      | 2,0 - 5,0           | 16,0 | 23,0 | 2,2  |

## Maße in mm

Bitte senden Sie  
Ihre Anfrage an:

Email: [vertrieb@auel-gmbh.de](mailto:vertrieb@auel-gmbh.de)  
Telefon: +49 2354 9046 24  
Adresse: Auf dem Bamberg 4  
58540 Meinerzhagen



Management  
System  
ISO 9001:2015