



Blindnietmutter FO-S4



Materialausführungen


Blindnietmutter (FO-S4)

Flachkopf offen, Stahl ohne Rändel

Oberfläche: verzinkt

Die Oberfläche ist RoHS konform

Sonderabmessungen auf Anfrage

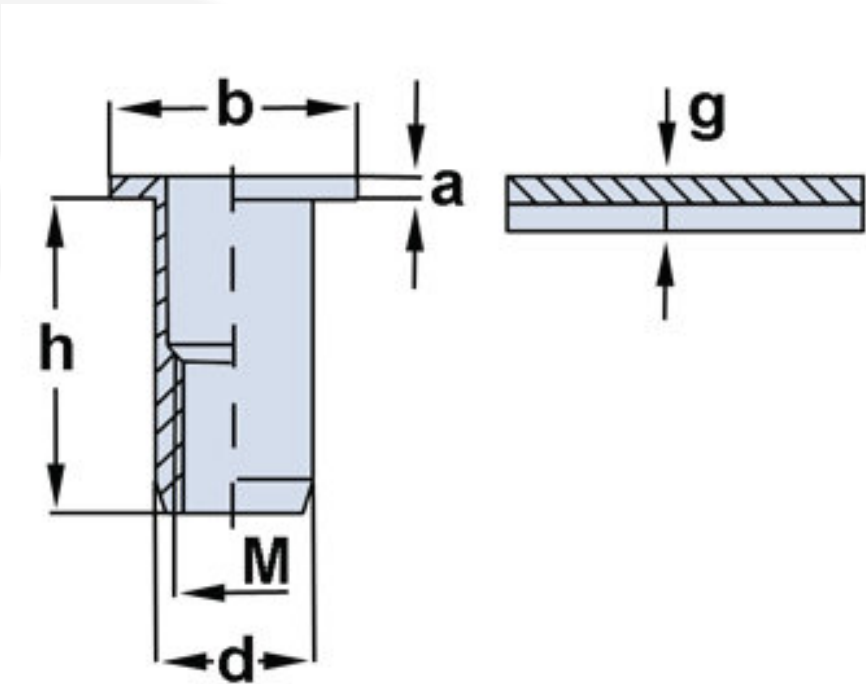

Gewinde M	d	h	Blechdicke (g)	Bohrung	Ø b	a
M4	5,9	9,7 11,7	0,3 - 2,0 2,0 - 4,0	6,0	9,0	0,8
M5	6,9	13,0 15,0 18,0	0,5 - 3,0 3,0 - 5,0 5,5 - 8,0	7,0	10,0	1,0
M6	8,9	14,5 16,5 19,0	0,5 - 3,0 3,0 - 5,5 5,5 - 8,0	9,0	13,0	1,5
M8	10,9	15,5 18,5 22,5	0,5 - 3,0 3,5 - 5,5 5,5 - 8,0	11,0	16,0	1,5
M10	11,9	19,3 22,3	1,0 - 3,5 3,5 - 6,0	13,0	17,0	1,7
M12	15,9	25,0	1,0 - 4,0	16,0	23,0	2,0

Maße in mm

Bitte senden Sie
Ihre Anfrage an:

Email: vertrieb@auel-gmbh.de
Telefon: +49 2354 9046 24
Adresse: Auf dem Bamberg 4
58540 Meinerzhagen



Management
System
ISO 9001:2015