



Rohreinpressmutter




Rohreinpressmutter (R-3S)

Serie R-3S

Material: Stahl blank

Oberfläche: Kern verzinkt, Feder brüniert

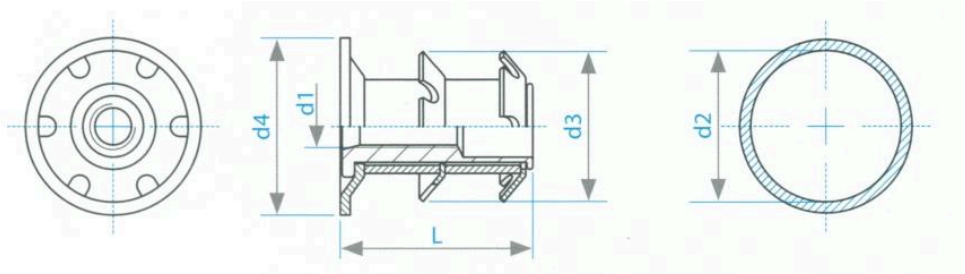

D1/ Gewinde	D2 / Rohr-Ø Innen	D3 / Mutter-Ø Außen ± 0,5	L / Gesamtlänge der Mutter	D4 / Bund-Ø	Code
M8	14,8 - 16,1	17,0	23 ± 1,0	19	R-3S-M8-14.8
	16,4 - 17,7	18,7		19	R-3S-M8-16.4
	17,9 - 19,3	19,7		22	R-3S-M8-17.9
	18,9 – 20,2	21,0		22	R-3S-M8-18.9
	19,5 - 20,9	21,6		22	R-3S-M8-19.5
	21,4 - 22,4	23,5		25	R-3S-M8-21.4
	24,6 - 25,6	26,5		28	R-3S-M8-24.6
	25,3 - 26,6	27,6		29	R-3S-M8-25.3
	26,0 - 28,0	28,9		30	R-3S-M8-26.0
	26,6 - 27,6	28,4		28.5	R-3S-M8-26.6
	28,4 - 29,8	30,8		32	R-3S-M8-28.4
	33,7 - 35,0	36,0		38	R-3S-M8-33.7
	34,8 - 36,1	37,1		38	R-3S-M8-34.8

Bitte senden Sie
Ihre Anfrage an:

Email: vertrieb@auel-gmbh.de
Telefon: +49 2354 9046 24
Adresse: Auf dem Bamberg 4
58540 Meinerzhagen



Management
System
ISO 9001:2015



Rohreinpressmutter




Rohreinpressmutter (R-3S)

Serie R-3S

Material: Stahl blank

Oberfläche: Kern verzinkt, Feder brüniert

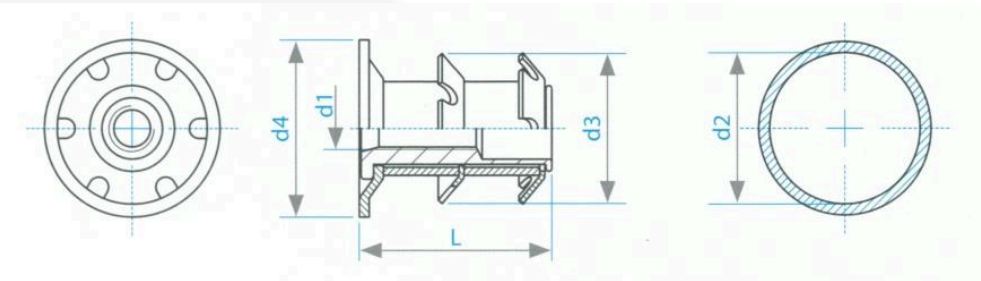

D1/ Gewinde	D2 / Rohr-Ø Innen	D3 / Mutter-Ø Außen ±0,5	L / Gesamtlänge der Mutter	D4 / Bund-Ø	Code
M10	18,9 – 20,2	21,6	23 ± 1,0	22	R-3S-M10-18.9
	21,4 - 22,4	23,5		25	R-3S-M10-21.4
	26,0 - 28,0	28,9		30	R-3S-M10-26.0
	31,7 - 32,9	33,7		35	R-3S-M10-31.7

Bitte senden Sie Ihre Anfrage an:

Email: vertrieb@auel-gmbh.de
Telefon: +49 2354 9046 24
Adresse: Auf dem Bamberg 4
58540 Meinerzhagen



Management System
ISO 9001:2015