



Blindnietmutter SKG-S5



Materialausführungen


Blindnietmutter (SKG-S5)

Senkkopf (klein) geschlossen, Stahl Sechskantschaft

Oberfläche: verzinkt

Die Oberfläche ist RoHS konform

Sonderabmessungen auf Anfrage

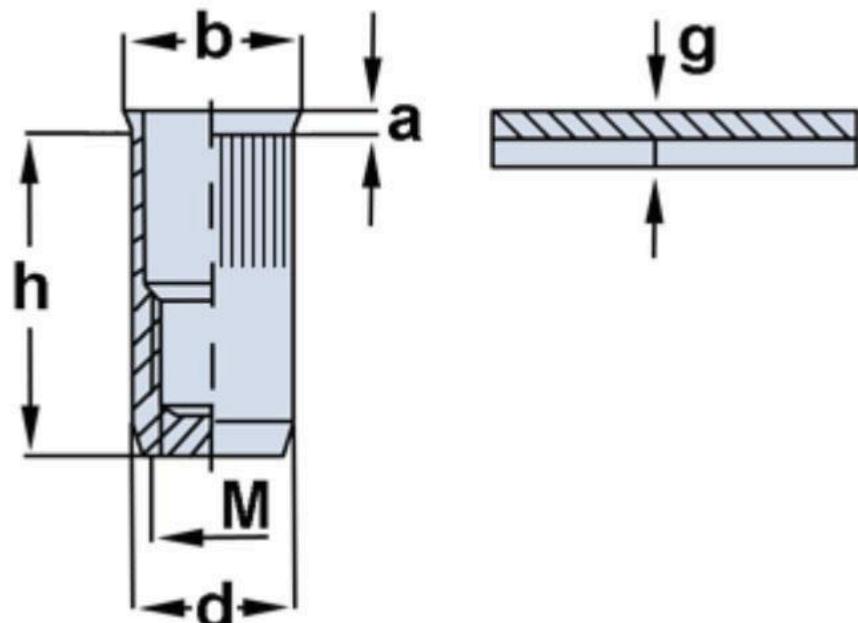

Gewinde M	d	h	Blechdicke (g)	s	Ø b	a
M4	5,9	11,0 13,5	0,5 - 2,5 2,5 - 4,0	6,0	7,0 7,6	0,5
M5	6,9	14,5 15,5	0,5 - 3,0 2,5 - 4,5	7,0	8,0 8,9	0,5
M6	8,9	16,0 18,0	0,5 - 3,0 3,5 - 6,0	9,0	10,0	0,5
M8	10,9	18,0 20,0	0,5 - 3,0 3,0 - 6,0	11,0	12,0	0,5
M10	12,9	19,0 22,5	1,0 - 4,0 3,0 - 6,0	13,0	14,5	0,5
M12	15,9	25,0	1,0 - 4,0	16,0	17,5	0,6

Maße in mm

Bitte senden Sie
Ihre Anfrage an:

Email: vertrieb@ael-gmbh.de
Telefon: +49 2354 9046 24
Adresse: Auf dem Bamberg 4
58540 Meinerzhagen



Management
System
ISO 9001:2015