



# Blindnietmutter SO-S1




## Blindnietmutter (SO-S1)

### Senkkopf offen, Stahl gerändelt

Oberfläche: verzinkt

Die Oberfläche ist RoHS konform

Sonderabmessungen auf Anfrage

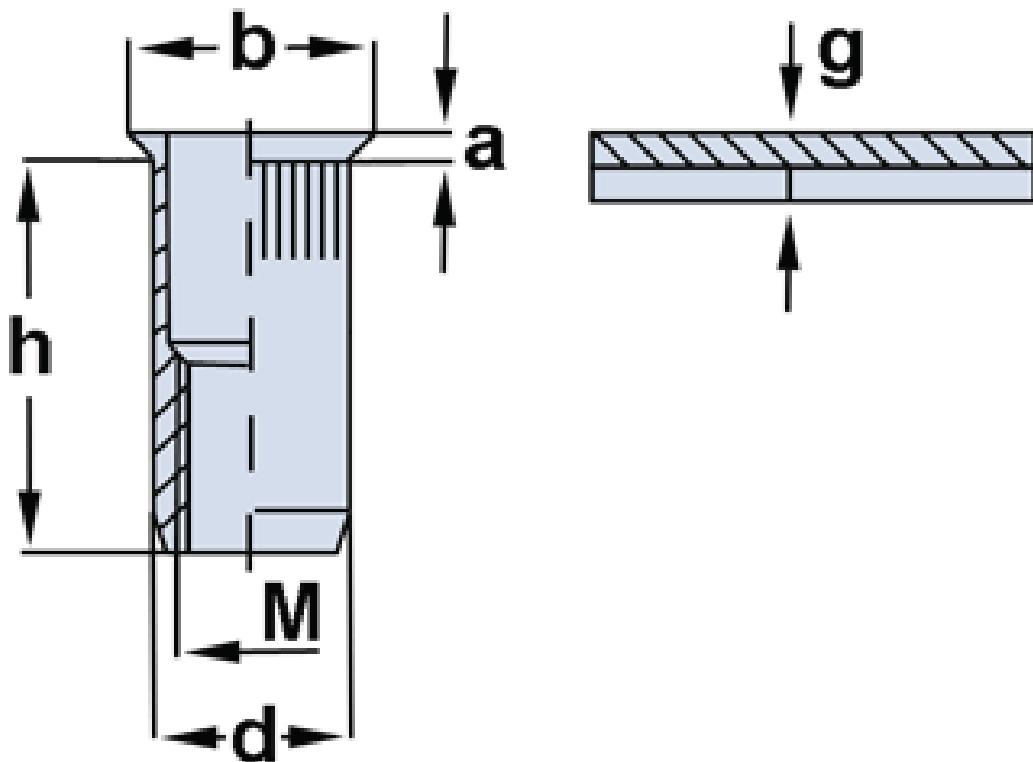

Gewinde	d	h	Blechdicke (g)	Bohrung	$\varnothing b$	a
M4	5,9	11,5	2,0 – 3,5	6,0	8,5	1,5
M5	6,9	13,5	2,0 – 4,0	7,0	9,5	1,5
M6	8,9	15,5	2,0 – 4,5	9,0	11,5	1,5
M8	10,9	19,0	2,0 – 4,5	11,0	13,5	1,5
M10	12,9	21,0	2,0 – 4,5	13,0	14,5	1,5
M12	15,9	24,0	1,7 – 4,5	16,0	19,0	1,9

### Maße in mm

Bitte senden Sie  
Ihre Anfrage an:

Email: [vertrieb@ael-gmbh.de](mailto:vertrieb@ael-gmbh.de)  
Telefon: +49 2354 9046 24  
Adresse: Auf dem Bamberg 4  
58540 Meinerzhagen



Management  
System  
ISO 9001:2015