



Blindnietmutter SO-S4



Materialausführungen


Blindnietmutter (SO-S4)

Senkkopf offen, Stahl ohne Rändel

Oberfläche: verzinkt

Die Oberfläche ist RoHS konform

Sonderabmessungen auf Anfrage

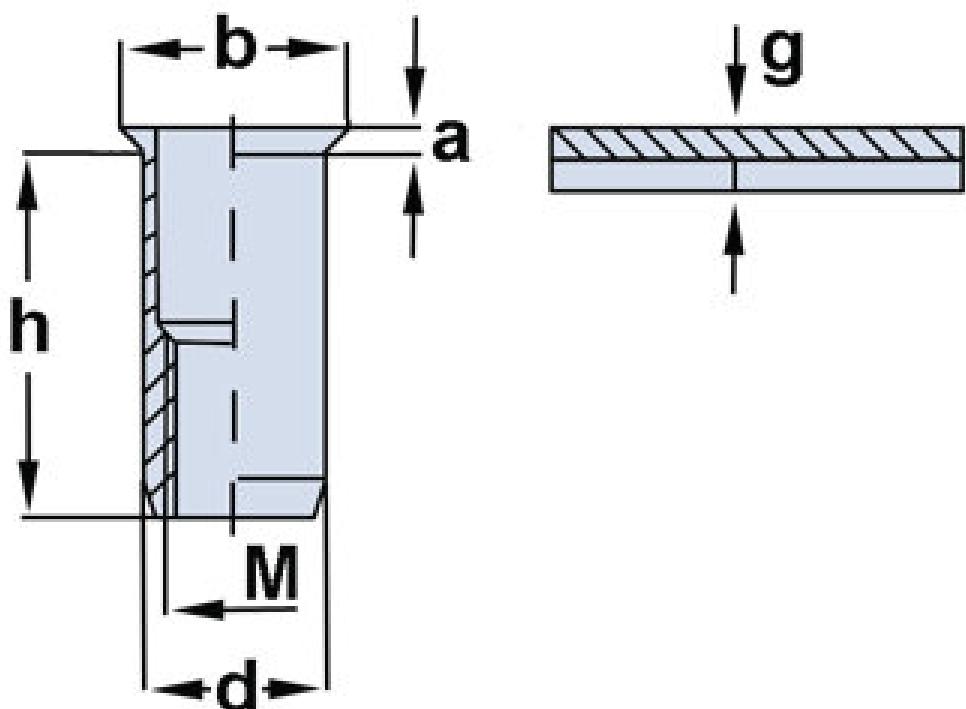

Gewinde M	d	h	Blechdicke (g)	Bohrung	Ø b	a
M3	4,9	11,5	1,5 - 3,0	5,0	8,0	1,5
M4	5,9	10,5 13,0	1,7 - 3,5 3,5 - 5,0	6,0	9,0	1,5
M5	6,9	13,0 15,0	1,7 - 4,0 4,0 - 6,0	7,0	10,0	1,5
M6	8,9	16,0 17,5	1,5 - 4,5 4,5 - 6,0	9,0	12,0	1,5
M8	10,9	18,5 20,0	1,5 - 4,5 4,5 - 6,0	11,0	14,0	1,5
M10	12,9	18,0 20,5	1,8 - 4,0 4,0 - 6,0	13,0	16,0	1,5
M12	15,9	26,0	2,0 - 4,5	16,0	19,0	1,8

Maße in mm

Bitte senden Sie
Ihre Anfrage an:

Email: vertrieb@ael-gmbh.de
Telefon: +49 2354 9046 24
Adresse: Auf dem Bamberg 4
58540 Meinerzhagen



Management System ISO 9001:2015