



Flachkopf- schraube 912FS



Flachkopfschraube (912FS)


DIN 912, Innensechskant

Stahl blank

Stahl verzinkt

Güte 8.8, 10.9, 12.9

Edelstahl A2 / A4

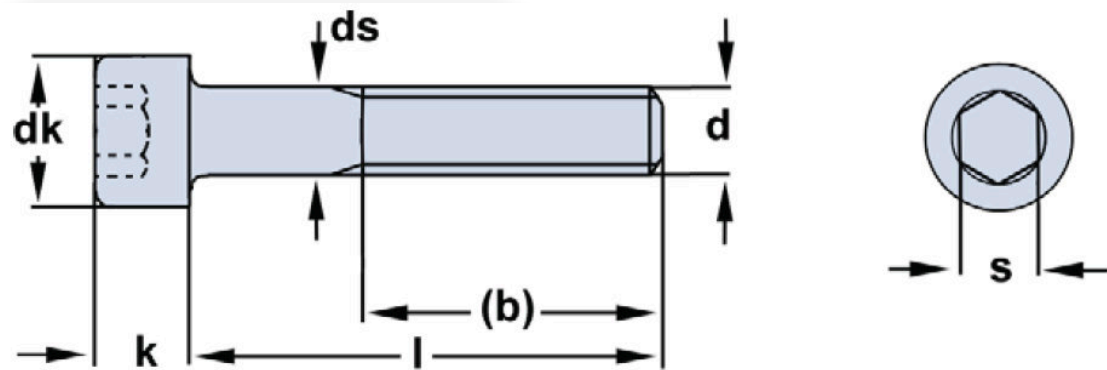

Gewinde d	Gewinde- länge b	Kopf Ø dk	Schaft Ø ds	Kopfhöhe k	Schrauben- länge l	Schlüssel- weite s
M1,4	14	2,74	1,4	1,4	2 – 12	1,4
M1,6	15	3,14	1,6	1,6	2,5 – 16	1,6
M2	16	3,98	2	2	3 – 20	1,6
M2,5	17	4,68	2,5	2,5	4 – 25	2,1
M3	18	5,68	2,86	3	5 – 30	2,6
M4	20	7,22	3,82	4	6 – 40	3,1
M5	22	8,72	4,82	5	8 – 50	4,1
M6	24	10,22	5,82	6	10 – 60	5,1
M8	28	13,27	7,78	8	12 – 80	6,1
M10	32	16,27	10	10	16 – 100	8,2
M12	36	18,27	12	12	20 – 120	10,2
M14	40	21,33	14	14	25 – 140	12,2
M16	44	24,33	16	16	25 – 160	14,2

Bitte senden Sie
Ihre Anfrage an:

Email: vertrieb@auel-gmbh.de
 Telefon: +49 2354 9046 24
 Adresse: Auf dem Bamberg 4
 58540 Meinerzhagen



Management
System
ISO 9001:2015

www.tuv.com
ID 0910081043