



Einpressmutter ACN-SZM




Einpressmutter (ACN-SZM)

Setzmutter

Stahl Einsatzgehärtet

Edelstahl 1.4305

Oberfläche RoHs konform, blau verzinkt

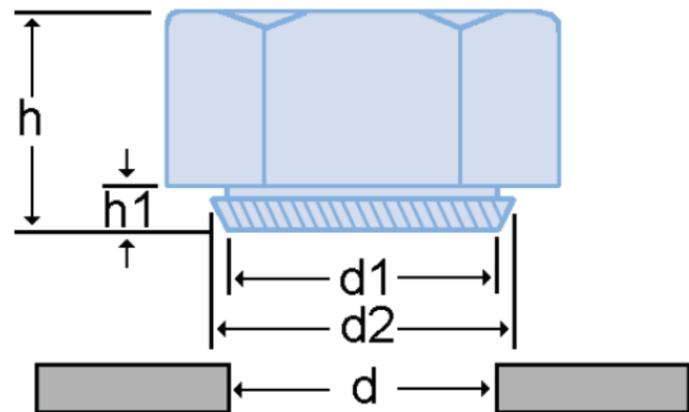

Gewinde	Min. Blechdicke in mm	Schlüsselweite	d* /d1 Ø in mm	d2 Ø in mm	h1 in mm	h in mm
M2	1	5,5	4,5	4,7	0,9	3,0
M3	1	5,5	4,5	4,7	0,9	3,0
M4	1	7	5,5	5,7	0,9	3,2
M5	1	8	6,5	6,75	0,9	4,0
M6	1	10	8,0	8,3	0,9	5,0
M8	2	13	10,0	10,3	1,9	6,5
M10	2	15	12,5	12,85	1,9	8,0
M12	3	17	14,5	14,85	2,9	10,0
M16	3	22	18,5	18,85	2,4	13,0
M20	4	27	23,0	23,4	3,9	16,0

***Bohrlochausgang H11, M3-M6 sind auch h1 als 1,8mm lieferbar**

Bitte senden Sie
Ihre Anfrage an:

Email: vertrieb@auel-gmbh.de
 Telefon: +49 2354 9046 24
 Adresse: Auf dem Bamberg 4
 58540 Meinerzhagen



Management System
ISO 9001:2015

www.tuv.com
ID 0910081043